


Technical Information: Alkaline Manganese Batteries

LR20 Standard

■ Dimension

		JIS/mm
h1	Overall height	Max. 61.5 Min.(59.5)
d6	Outer diameter of the negative contact range	Min. 18.0
h4	Recess of negative contact from enclosure	Max. 1.0
d3	Diameter of the positive contact	Max. 9.5 Min. (7.8)
h3	Height of the protected flat contact form the next higher	Min. 1.5
d1	Diameter	Max. 34.2 Min. 32.3

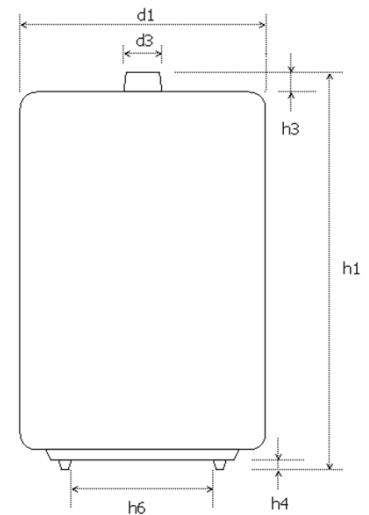

■ Rating

Type designation	LR20 Standard	
Norminal Voltage	1.5V	
Weight	132g	
Typical capacity	15,000mAH (20Ω Cont. Discharge)	
Outer dimentsion	Height 60.9mm Diameter 33.0mm	
Average Dyratuib @ 20°C (Not guranteed perormance	600mA 2hr/day(0.9V) Portable stereo	14hr
	10 Ω 4hr/day(0.9V) Radio	110hr
	2.2 Ω 1hr/day(0.8V) Toy	22hr

Note) Value in parentheses is end point voltage of each discharge

■ Discharging curve

