

## ER 14505H

**SPECIFICATION: (23±2°C)**

Nominal capacity (2mA~2V):	2.4Ah
Rated voltage:	3.6V
Max constant current of discharge:	100mA
Max discharge current(pulse):	200mA
Weight:	22g
Operating temperature range:	-55~85°C

S: Standard termination


**Notes:**

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


**Important Notes**

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


**Discharge characteristics at 23±2°C**

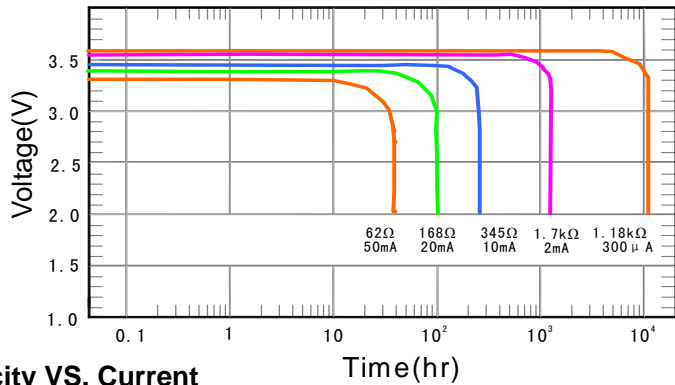

Capacity VS. Current

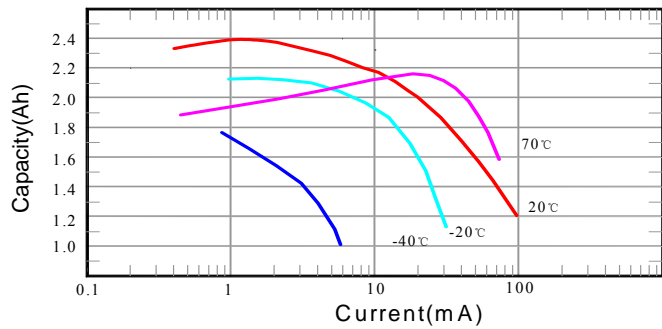

Voltage VS. Temperature

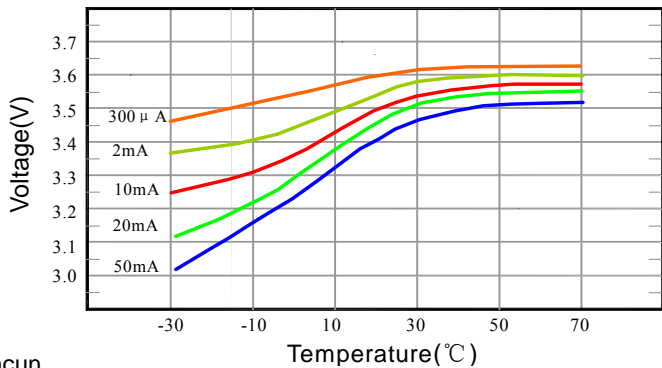

Guangzhou Markyn Battery Co., Ltd.  
 YiJia Industrial Park , Shixin Road 1100 ,Nancun  
 Town,Panyu District, Guangzhou P.R.C  
 Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936  
 Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782