


Li/MnO₂ Battery: CP224147

Technical data

- Nominal capacity: 800mAh
- Nominal voltage: 3.0V
- Max. continuous current: 200mA
- Max. pulse current: 400mA
- Standard discharge current: 1mA
- Working temperature range: -40°C ~ +70°C
- Weight: 6.5g

 U.L.Component Recognition (MH 46165)

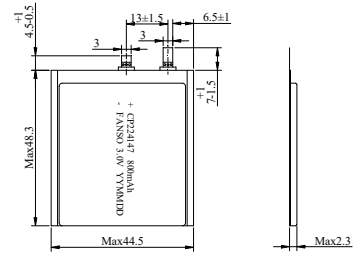


Applications

- ESL
- Security devices
- IoT devices


Features & Benefits

- Superior long-term reliability
- Low self-discharge rate
- High safety and energy density
- Customized

1. Discharge characteristics at +23°C

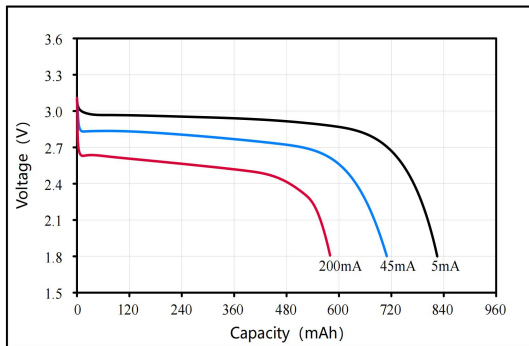

2. Temperature characteristics at different current

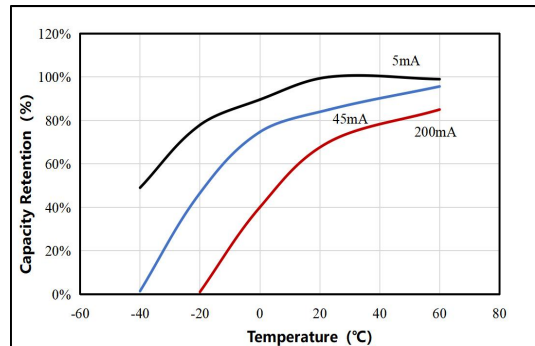

WARNING:

Do not short circuit, charge or make the anode and the cathode reversed. Do not force-discharge, squeeze, puncture or burn the battery. The battery should be taken off from instrument when it is consumed to cut-off voltage, and dispose according to local laws, or hand it to professional recycle institution.

ATTENTION:

Consult FANSO when using batteries at temperature exceeding the -10°C ~ +40°C range. The above data comes from FANSO's laboratory, any representations in this document concerning performance are for informational purpose only. FANSO Technology Co., Ltd reserves the right to interpret this data.



Official website
Issued in Mar. 2023