


Data Sheet


Type Number	24223
Designation IEC	8LR932
System	Manganese dioxide / Zinc/KOH - Electrolyte
Nominal Voltage	12,0 V
Typical Capacity C	50mAh
Load 20 kOhm, at 20°C down to 8.00 V	
Weight (approx.)	8,10 g
Volume	2,3 ccm
Coding	Date of Manufacturing Year/Month

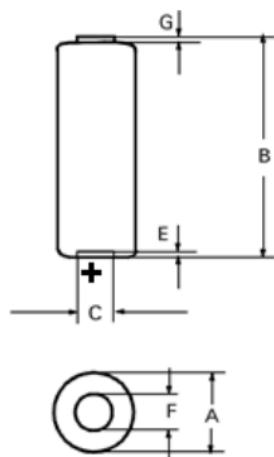

Temperature Ranges	min	max.
Storage	-10°C	65°C*
Discharge	-10°C	65°C*
Dimensions	min	max.
Diameter (A)	9,70	10,30
Height (B)	27,50	28,50
Shoulder Diameter [F]	3,50	6,00
Shoulder Height [G]	0,50	
Reverse Shoulder Diameter [C]	4,70	
Reverse Shoulder Height [E]		0,40

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	8.00 V
Continuous	20000Ω	Time:	100 h
24h/d, 7d/w		Capacity [mAh]:	50
Current [μA]:		Energy [mWh]:	530

* Contact VARTA if the application is intended to be outside the range of -10°C to +65°C.

Information and contents in this data sheet are for reference purpose only.
 They do not constitute any warranty or representation and are subject to change without notice.
 For most current information and further details, please contact your VARTA representative.

VARTA Microbattery GmbH, VARTA-Platz 1, D-73479 Ellwangen/Jagst
 Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-2553
 Date of issue: 2023-06-07

Subject to change without prior notice!