

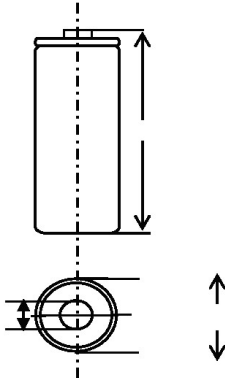
Model: 1.2V 1300 Mah - AA Size - Ni-Mh Battery - Flat Version

Stock Code: 900.600.503.006

TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	1.2V	
Nominal Capacity	1.300 mAh	Standard charge and Standard discharge
Discharge Cut-off Voltage	1.0V	
Internal Impedance	$\leq 40\text{m}\Omega$	Within 1 hr after standard charge
Charge	Standard	130 mA (0.1C) / Charge at 0.1C for 16 hours / 0°C to 40°C
	Rapid Charge	1.300 mA (1.0C) / ambient temperature of $20\pm 5^\circ\text{C}$, Relative Humidity: $65\pm 20\%$
	Trickle Charge	26 ~ 65 mA / (0.02C ~ 0.05C) $T_a = -10 \sim 45^\circ\text{C}$
Discharge	Standard	260 mA (0.2C) / standard charge, the final voltage is 1.0V
	Rapid Discharge	1.300 mA (1.0C) / standard charge, the final voltage is 1.0V
	Maximum Discharge	1.300 mA (1C) Rapid discharge, the final voltage is 0.8V
Over-charge	No leakage nor explosion Capacity $\geq 100\%$	0.2C discharge to 1.0V , 0.1C charge for 48 hrs, then test the Capacity with Standard discharge Conditions
Over-discharge	80%. No leakage nor explosion Capacity $\geq 1040\text{mAh}$	0.2C discharge to 1.2V, Combine the battery with a 4.6Ω electric resistance, after stored for a period of 24 hrs, then test the Capacity with Standard discharge Conditions
Charge-retention Rate	Nominal capacity 60%(780mAh)	Storage a period of 28 days after standard charge, then Standard discharge (0.2C) to 1.0V
Weight	22gr	Approximately
Operation Temperature	0 ~ 40°C	Standard Charge
	10 ~ 40°C	Fast Charge
	-10 ~ 50°C	Discharge
Storage Temperature	-10°C to 30°C	Within 1 Year
	-10°C to 40°C	Within 3 Months
Cycles Test	≥ 500 Cycles	IEC61951-2:2003

Model: 1.2V 1300 Mah - AA Size - Ni-Mh Battery - Flat Version
Stock Code: 900.600.503.006

Description	Dimension	Technical Drawing
Diameter	13.8 ± 14.5 mm	
Height	47.0 ± 49.0 mm	
Image		