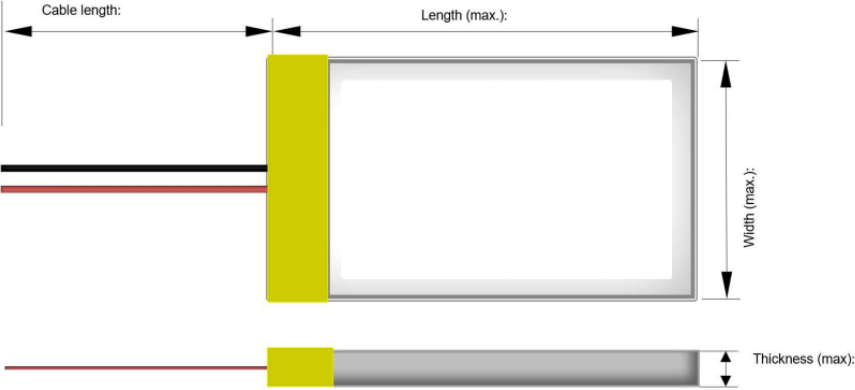


Model: PX503759 3.7V 1200 mAh- BMS

Stock Code: 900.869.503.306

Item	Specifications	Conditions
Nominal Voltage	3.7±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.20±0.05V
Typ. Capacity	1.200 mAh	0.2C discharge
Standard Discharging Current	240 mA (0.2C)	Constant current 0.2C end voltage 2.75V
Max. Discharge Current	1.200 mA (1.0C)	
Temperature	Charge	0 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C
		less than 3 months: -20~40°C
Weight	25 g	approximately
Cycles Test	Higher than 70% of the Initial Capacities of the Cells Carry out 500cycle Charging/Discharging in the below condition. ♦Charge: Standard Charge ♦Discharge: 0.5C to 2.75 V ♦Rest Time between charge /discharge: 30min. ♦Temperature: 20±5°C	

Model: PX503759 3.7V 1200 mAh- BMS
Stock Code: 900.869.503.306

Item	Specifications	Representative Image
Thickness	5.0±2mm	
Width	37.0mm±2mm	
Length	59.0mm±2mm	
Cable Length	100±0.3mm	