


Model: CR2050 3V

Stock Code: 900.600.503.488

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	320 mAh	Standard discharge with load 7.5kΩ
Instantaneous short-circuit current	≥250 mA	Time≤0.5 second
Off-load voltage	≥3.20 V	No load
Operating temperature	-20~60	
Typical Weight	4.1 g	
Service Output - Initial	900 h	Continuous discharge with load 7.5kΩ, till 2.0v end-voltage
Service Output – After 12 months storage	850 h	
Shelf Life	3-5 Years	Recommended Storage Range : 20+/-2°C Recommended Humidity Range : 65+/-20%RH

Technical Drawing

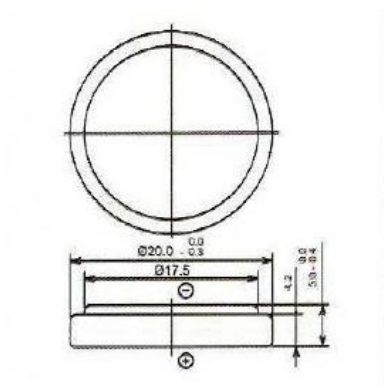

STANDARD

Diameter

20.0 (-0.2) mm


Height

5.0 (±0.2) mm


Model: CR2050 3V

Stock Code: 900.600.503.488


Discharge Characteristics

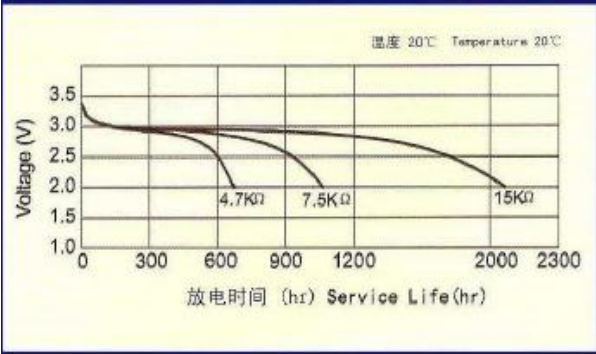

Temperature Characteristics

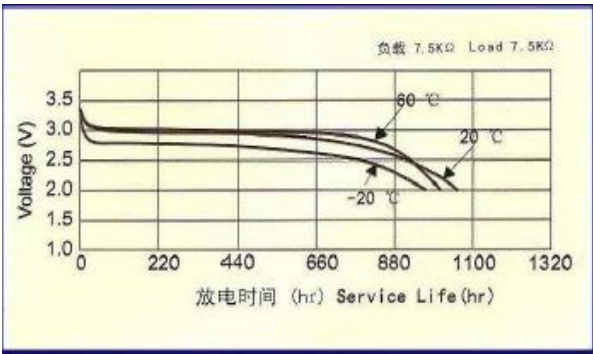

Load Capacity

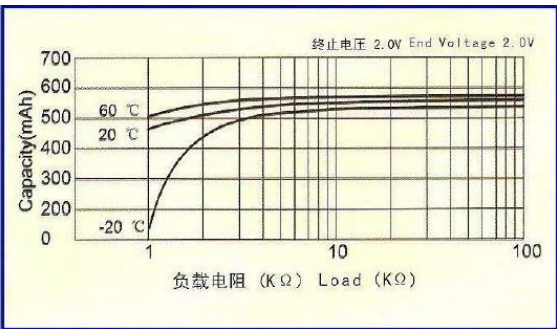

Pulse Discharge Characteristics

