

**Model:** PX18650-20LW 3.7V 2000 mAh 1C


**Stock Code:** 900.600.503.479

Item	Specifications	Conditions
Nominal Voltage	3.7±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.25V
Typ. Capacity	2.000 mAh	Discharge cell from 4.2V to 2.75V by 0.5C current
Standard Charge Current	1.000 mA (0.5C)	
Standard Discharge Current	1.000 mA (0.5C)	
Max charge current	1C	
Max discharge current	1C	
Maximum Continuous Discharge Current	2.000 mA	1.0C
Temperature	Charge	0 to +45°C
	Discharge	-20 to +60°C
Weight	44±2 gr	approximately
Cycle Life	Standard charged under the condition of normal atmospheric pressure and the environmental temperature of 25°C±2.5°C and 45% ~ 75%RH, then rest for 30min and discharge at 0.5C to the discharge cut-off voltage respectively. Nominal capacity get 80% cycle times.	

### TECHNICAL DRAWING

#### Dimensions

Diameter	18.3±0.3 mm
Height	65.50±0.5mm

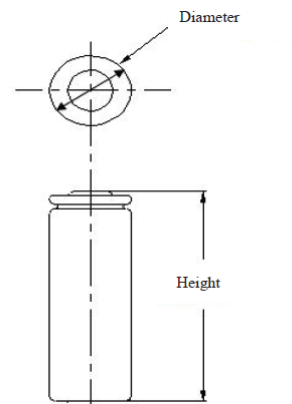

REV002-05.06.2026