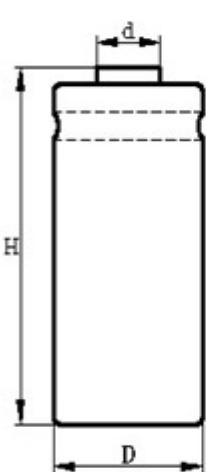


Model Power-Xtra PX8AAFT - 1.2V 800 Mah - AA - Ni-Cd Ni-Cd Battery - Flat Head
Stock Code 900.600.503.377

Item	Specifications	Conditions
Nominal Voltage	1.2V	
Nominal Capacity	850 mAh	Standard Charge/Discharge
Minimum Capacity	800 mAh	
Standard Charge	80 mA (0.1C) × 16 hrs	Ambient temperature of 20±5°C, Relative Humidity: 65±20%
Standard Discharge	300 mA (0.2C)	to 1.0V/cell / -20°C to 60°C
Fast Charge	160mA for 1.3 hours	-delta V controlled: 15mV/cell cut-off dT/dt controlled: 1°C per min
Trickle Charge	40 mA to 65 mA.	Ta=0 ~ 45°C
Fast Discharge	800mA to 1.0V	10°C to 40°C
Maximum Continuous Discharge Current	2.400 mA	3.0C
Storage Temperature	-20 °C ~ 35°C	Discharged state
Weight	16gr. / approx.	
Open Circuit Voltage(OCV)	≥1.25V	Within 1hr after standard charge
Internal Impedance	≤30mΩ	The initial internal resistance is measured at 1KHz within 1-4 hours after standard charge.
Overcharge	No leakage nor explosion	The overcharge test is measured with a discharge current of 0.2C and a discharge final voltage of 1.0V/cell within 1-4 hours after charging for 28 days at a current of 0.1C. Check cell appearance after overcharge.
Charge Retention	≥160mA	After standard charge and storage time of 28 days at an ambient temperature of 20°C±2°C, the capacity is measured with a discharging current of 0.2C and a discharge final voltage of 1.0V.
Cycles Test	≥500 Cycle	IEC61951-2:2003

Model Power-Xtra PX8AAFT - 1.2V 800 Mah - AA - Ni-Cd Ni-Cd Battery - Flat Head

Stock Code 900.600.503.377

Item	Specifications	Drawings
Diameter	14.4 +0 / -1.0 mm	 $d=5.0 \pm 0.05^{+/-}$ $H=49.0 \pm 0.5^{+/-}$ $D=14.4^{+0.4}_{-0.4}^{+/-}$ (尺寸单位:mm)¹
Height	49.0 +0 / -1.5 mm	
High Top	-	
Image		