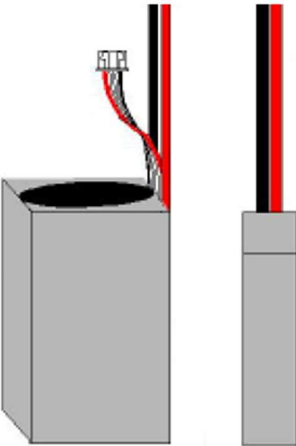


Model: Power-Xtra PX2200HP2S - 2S1P - 7.4V 2200 mAh Li-Polymer Battery -30C

Stock Code: 900.869.503.281

Item	Specifications	Conditions
Nominal Voltage	7.4V±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	8.4V±0.05V
Typ. Capacity	2.200 mAh	0.2C Discharge cut-off Voltage 3.0V after standard charge at 23±2°C
Maximum Charge Voltage	8.4V	4.2V/Cell
Configuration	2S1P	
Standard Charging Current	2.200 mA	1.0C
Standard Discharging Current	2.200 mA	1.0C
Maximum Charging Current	4.400 mA	2.0C
Max. Constant Discharge Current	66 A	30.0C - Ref.Temperature:10-50°C
Max. Burst Discharge Current	132 A	60.0C ≤3S
Discharge Cut-Off Voltage	6.0V	
Temperature	Charge	0 to +10°C
		10 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20-25°C
		less than 3 months: -20-30°C
		less than 1 months: -20-45°C
		Recommended storage temperature: 25±2°C, at the shipment state
Weight	135 gr	approximately
Cycles Test	Measure capacity under the cycle conditions described below, until the discharge capacity ≤80% for three times. Cycle conditions: Standard Charge (CC-CV, 0.2C, 4.2V) , Rest for 30min; Discharge with 1C, 3.0V cutting off. Testing temperature is 23±2°C Cycle Life≥500 cycles	

Model: Power-Xtra PX2200HP2S - 2S1P - 7.4V 2200 mAh Li-Polymer Battery -30C
Stock Code: 900.869.503.281

Item	Description	Dimension	Technical Drawing
T	Thickness	17.8± 0.2 mm	
W	Width	36.0± 1 mm	
L	Length	107.5± 1 mm	
BP	Balance Plug	JST-XHP-4 3239-22	
DP	Discharge Plug	-	

Image

