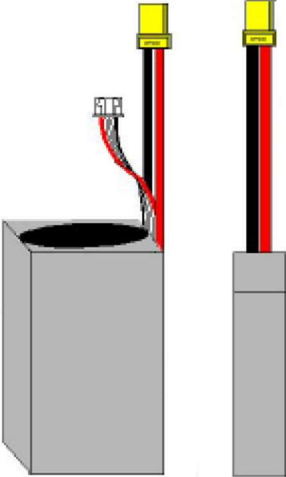


Model: Power-Xtra PX1000XL2S - 2S1P - 7.4V 1000 mAh Li-Polymer Battery -15C

Stock Code: 900.869.503.147

Item	Specifications	Conditions
Nominal Voltage	7.4V±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	8.4V±0.05V
Typ. Capacity	1.000 mAh	0.2C Discharge cut-off Voltage 3.0V after standard charge at 23±2°C
Maximum Charge Voltage	8.4V	4.2V/Cell
Configuration	2S1P	
Standard Charging Current	1.000 mA	1.0C
Standard Discharging Current	1.000 mA	1.0C
Maximum Charging Current	2.000 mA	2.0C
Max. Constant Discharge Current	15 A	15.0C - Ref.Temperature:10-50°C
Max. Burst Discharge Current	20 A	20.0C ≤3S
Discharge Cut-Off Voltage	6.0V	
Temperature	Charge	0 to +10°C
		10 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20-25°C
		less than 3 months: -20-30°C
		less than 1 months: -20-45°C
Weight	58 gr	approximately
Cycles Test	Measure capacity under the cycle conditions described below, until the discharge capacity ≤80% for three times. Cycle conditions: Standard Charge (CC-CV, 0.2C, 4.2V) , Rest for 30min;Discharge with 1C, 3.0V cutting off. Testing temperature is 23±2°C Cycle Life≥500 cycles	

Model: Power-Xtra PX1000XL2S - 2S1P - 7.4V 1000 mAh Li-Polymer Battery -15C
Stock Code: 900.869.503.147

Item	Description	Dimension	Technical Drawing
T	Thickness	18.6± 0.2 mm	
W	Width	32.0± 1 mm	
L	Length	57.0± 1 mm	
BP	Balance Plug	JST-SMP-4P 3239-18	
DP	Discharge Plug	JST-SMP-4P 3239-18	

Image

