

BK80AAAB

Nickel Metal Hydride

Panasonic

Features & Benefits

- Efficient, lower cost charge requirements with excellent cycle life.
- Options for broader operating temperatures.
- Versatile Applications including: Security, Medical, Automotive and Industrial Infrastructure.
- Higher levels of energy density, demanded by today's electronics.
- No transportation issues.
- Cells designed specifically to meet different, rigorous environments.

Specifications

Nominal

Capacity: 780 mAh Typically

Nominal Voltage: 1.2V

Weight: Approximately 13g


Operating Temperature: 0°C - +45°C

Dimensions





Unit: mm

Typical Charge Characteristics

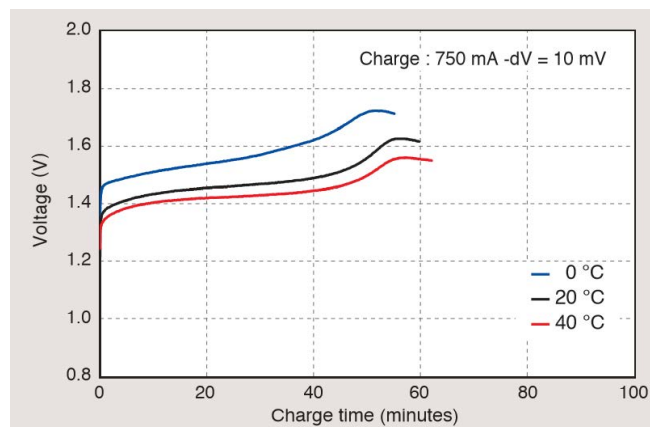

Typical Discharge Characteristics

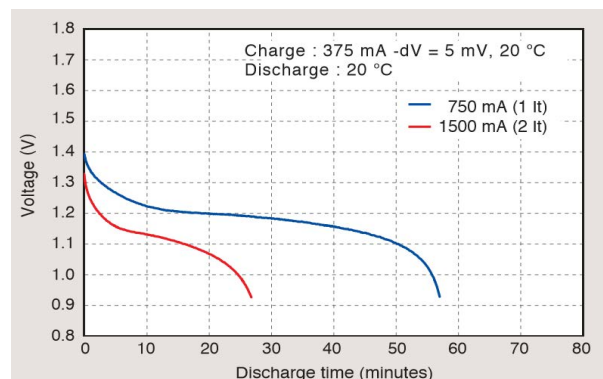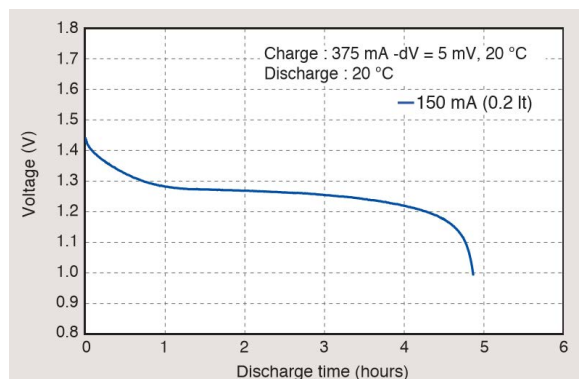

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit www.na.industrial.panasonic.com/products/batteries or e-mail oembatteries@us.panasonic.com.

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.