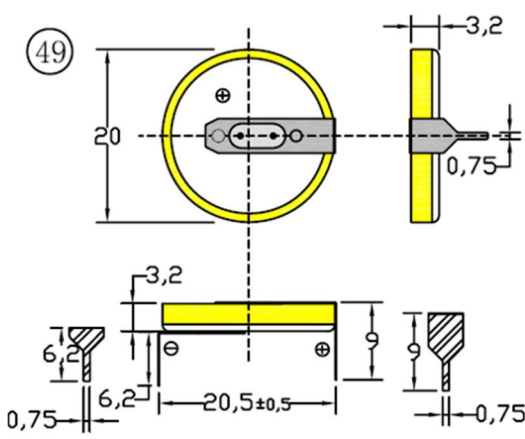



Model	Power-Xtra CR2032-49YV - 3V Li-MnO ₂ - Lithium Battery - 2 Pins - Horizontal - 20mm
Stock Code	900.600.503.123
Model	CR2032, CR-2032, PX-CR2032-49YV

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	210 mAh	Standard discharge with load 15k Ω
Instantaneous short-circuit current	≥ 250 mA	Time ≤ 0.5 second
Off-load voltage	≥ 3.20 V	No load
Service Output - Initial	1132 h	Continuous discharge with load 15k Ω , till 2.0v end-voltage, Temperature $20 \pm 2^\circ\text{C}$, under the condition of related humidity $\leq 75\%RH$
Service Output - After 12 months storage	1110 h	
Typical Weight	2.75 gr	
Recommended Storage Temperature Range	$20 \pm 2^\circ\text{C}$	5 years after delivery under proper storage conditions.
Recommended Operation Temperature Range	-20°C to 60°C	
Shelf Life	3-5 Years	Recommended Storage Range : $20 \pm 2^\circ\text{C}$ Recommended Humidity Range : $65 \pm 20\%RH$


Image	Technical Drawing	STANDARD	
		Diameter	20.0 (-0.2) mm
		Height	3.2 (± 0.1) mm

Model	Power-Xtra CR2032-49YV - 3V Li-MnO2 - Lithium Battery - 2 Pins - Horizontal - 20mm
Stock Code	900.600.503.123
Model	CR2032, CR-2032, PX-CR2032-49YV


Discharge Characteristics

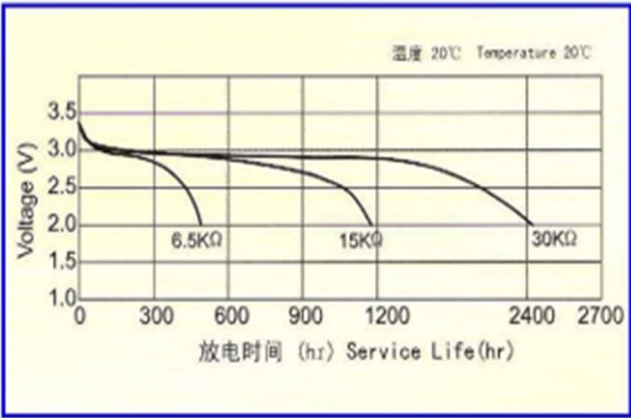

Temperature Characteristics

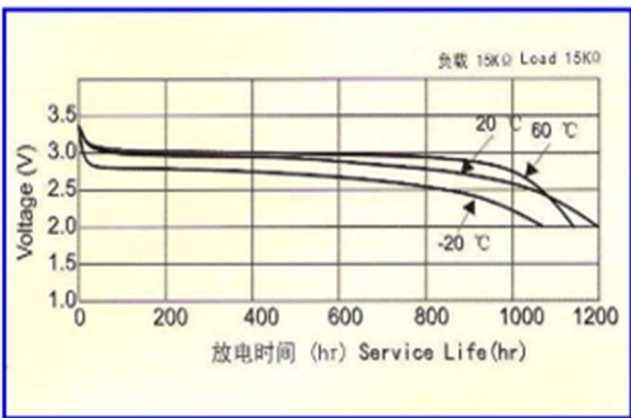

Load Capacity

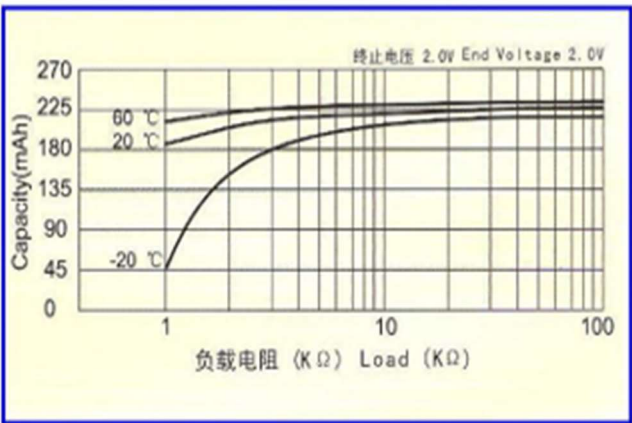

Pulse Discharge Characteristics

