

Power-Xtra CR2330-1F5DV - 3V Lithium Li-MnO₂ Battery - 2 Pins - Vertical

SPECIFICATIONS OF SINGLE CELL

Type	Li-MnO ₂ Buton with Pins
Stock Code	900.600.503.029
Model	CR2330, CR-2330, PX- CR2330-1F5DV
Model	CR2330, CR-2330


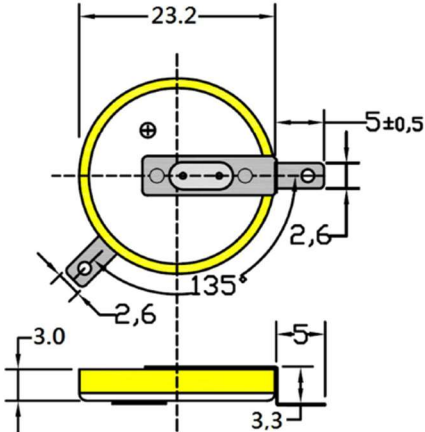
TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	280 mAh	Standard discharge with load 7.5k Ω
Instantaneous short-circuit current	≥ 250 mA	Time ≤ 0.5 second
Off-load voltage	≥ 3.00 V	No load
Service Output - Initial	1300 h	Continuous discharge with load 15k Ω , till 2.0v end-voltage at 20~25°C
Service Output - After 12 months storage	1200 h	
Typical Weight	4.2 gr	
Recommended Storage Temperature Range	20+/-2°C	5years after delivery under proper storage conditions.
Recommended Operation Temperature Range	-20° C to 60°C	
Shelf Life	5-7 Years	Recommended Storage Range : 20+/-2°C Recommended Humidity Range : 65+/-20%RH

Power-Xtra CR2330-1F5DV - 3V Lithium Li-MnO₂ Battery - 2 Pins - Vertical

TECHNICAL INFORMATION

Item	Test Methods	STANDARD	
Dimension	Using vernier caliper (accuracy \geq 0.02) while avoiding short-circuit	Diameter	23.2 (-0.20) mm
		Height	3.0 (\pm 0.1) mm
Off-load voltage	Using multimeter (accuracy \geq 0.25%) internal resistance \geq 1M Ω	\geq 3.30v	
Instantaneous short-circuit current	Time of short-circuit should be less than 0.5 second and avoid repeated test within half an hour	\geq 280 mA	
Appearance	Eyeballing	Bright, clean, no rust, no leakage, And no flaw	
Capacity	Continuously discharge with load 7.5k Ω , temperature at 20~25°C, humidity at 65 \pm 20% till 2.0v end-voltage (for fresh battery only: within 3 months)	\geq 1200 h	
Vibration test	Put battery on the platform of the vibrations machine, start the machine and adjust the frequency form 10 times per minute to 15 times per minute. keep it running for an hour	Characteristics keep stability	
Leakage at high temperature test	Stored under temperature (50°C) for 10 days	No leakage allowed	
Over discharge Test	After 2.0v end-voltage, continuously discharged for 5 hours	No leakage allowed	

Image	Technical Drawing	STANDARD	
		Diameter	23.2 (-0.2) mm
		Height	3.0 (\pm 0.1) mm