



Designation:..... 18902 101 121
Battery Requirement: 6 x AA or 3 x AA Alkaline Battery
Bulb required:..... 1 pcs. CREE XHP50.2, 14W 6500k cool white LED
Luminous intensity:.....

Spot Mode:		Flood Mode:	
6AA High:	1000 lm	6AA High:	600 lm
6AA Med:	500 lm	6AA Med:	300 lm
6AA Low:	100 lm	6AA Low:	70 lm
3AA High:	750 lm	3AA High:	400 lm
3AA Med:	300 lm	3AA Med:	200 lm
3AA Low:	60 lm	3AA Low:	50 lm

Beam distance:.....


6AA High:	240 m	3AA High:	200 m
6AA Med:	187 m	3AA Med:	160 m
6AA Low:	92 m	3AA Low:	70 m

Weight:..... 418,7 g (without batteries)

Material: PC (Polycarbonate)
 PMMA

All contact parts made of bronze or nickel plated steel

For use with only 3AAs:
Place batteries in front 3 positions or
back 3 positions of the battery cartridge

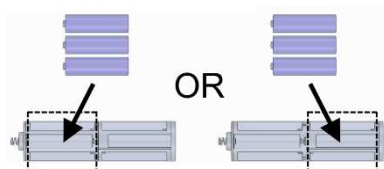

Dimensions (mm):

A:	234.9
B:	48
C:	39.1
D:	43.1 (with bracket clip)

Run Time (with Varta LLP):

6AA High:	4 h	3AA High:	2 h
6AA Med:	8 h	3AA Med:	4 h
6AA Low:	65 h	3AA Low:	30 h

Features (Technical):

- Super bright Cree white LED
- Type II anodized
- MCU Control multiple functions push switch (High/Med/Low/Off), double push-Strobe/Off
- 4 sec. memory wipe: Reset mode to off or reset off to high mode if longer than 4 sec.
- Slide head to focus beam (spot to flood or flood to spot)
- Broad and consistent flood beam with ultra-view area
- Twist Lock access via Tail Cap & Bracket clip removal function
- Eye Risk Group 2
- 2 meters drop test

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries