


|                               |                                                  |
|-------------------------------|--------------------------------------------------|
| Type Designation              | 4034                                             |
| Designation IEC               | 4 LR44                                           |
| System                        | Manganese Dioxide                                |
| Shelf Life *                  | 3 years                                          |
| Nominal Voltage [V]           | 6                                                |
| Typical Capacity C [mAh]      | 100 (Load 20000 $\Omega$ at 20° C down to 4.4 V) |
| Permissible Temperature Range | - 10 °C ... 65 °C                                |
| Weight, approx. [g]           | 10.4                                             |
| Volume [ccm]                  | 3.3                                              |

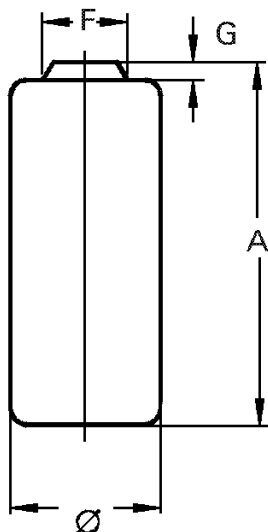

| Dimensions [mm] | min:  | max:  |
|-----------------|-------|-------|
| A               | 23.90 | 25.20 |
| F               | 6.50  |       |
| G               | 0.70  |       |
| Ø               | 12.00 | 13.00 |

### Typical Capacities (at 20°C)

| Discharge Type | Load           | End Voltage[V] | 4.4 |
|----------------|----------------|----------------|-----|
| Continuous     | 20000 $\Omega$ | Time [h]       | 380 |
| 24h/d, 7d/w    |                | Capacity [mAh] | 100 |
|                |                | Energy [mWh]   | 530 |

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**

\* In consideration of typical loss of capacity at storage and application.