

Power-Xtra CR2016 3V Lithium Battery

SPECIFICATIONS OF SINGLE CELL

Type Li-MnO₂ Buton
Model CR2016, CR-2016


TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	75 mAh	Standard discharge with load 15k Ω
Instantaneous short-circuit current	≥ 200 mA	Time ≤ 0.5 second
Off-load voltage	≥ 3.20 V	No load
Service Output - Initial	720 h	Continuous discharge with load 30k Ω , till 2.0v end-voltage at 20~25°C
Service Output - After 12 months storage	700 h	
Typical Weight	1.6 gr	
Recommended Storage Temperature Range	20+/-2°C	5years after delivery under proper storage conditions.
Recommended Operation Temperature Range	-20° C to 60°C	
Shelf Life	5-7 Years	Recommended Storage Range : 20+/-2°C Recommended Humidity Range : 65+/-20%RH


Item	Test Methods	STANDARD	
Dimension	Using vernier caliper (accuracy ≥ 0.02) while avoiding short-circuit	Diameter	20.0 (-0.20) mm
		Height	1.6 (± 0.1) mm
Off-load voltage	Using multimeter (accuracy $\geq 0.25\%$) internal resistance $\geq 1M\Omega$	≥ 3.20 v	
Instantaneous short-circuit current	Time of short-circuit should be less than 0.5 second and avoid repeated test within half an hour	≥ 200 mA	
Appearance	Eyeballing	Bright, clean, no rust, no leakage, And no flaw	
Capacity	Continuously discharge with load 7.5k Ω , temperature at 20~25°C, humidity at 65 \pm 20% till 2.0v end-voltage (for fresh battery only: within 3 months)	≥ 720 h	
Vibration test	Put battery on the platform of the vibrations machine, start the machine and adjust the frequency form 10 times per minute to 15 times per minute. keep it running for an hour	Characteristics keep stability	
Leakage at high temperature test	Stored under temperature (50°C) for 10 days	No leakage allowed	
Over discharge Test	After 2.0v end-voltage, continuously discharged for 5 hours	No leakage allowed	

Power-Xtra CR2016 3V Lithium Battery


Discharge Characteristics

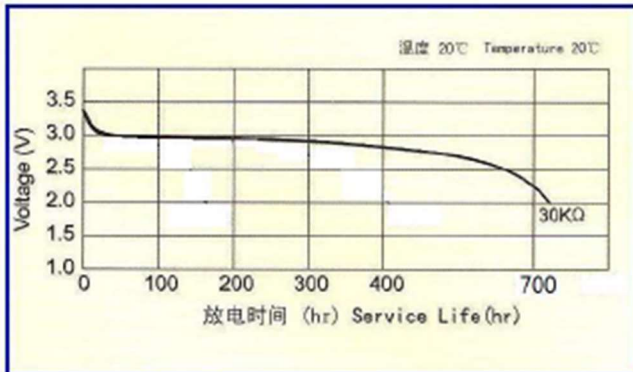

Temperature Characteristics

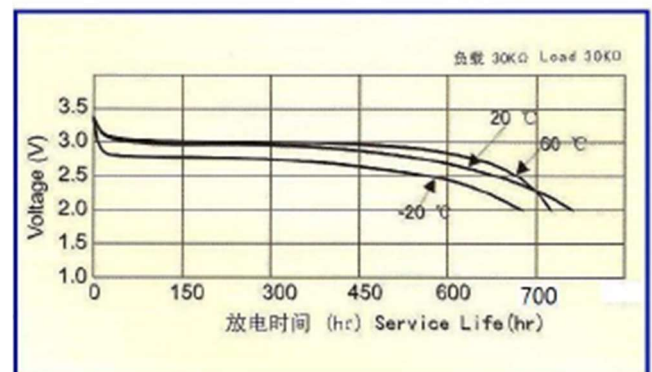

Load Capacity

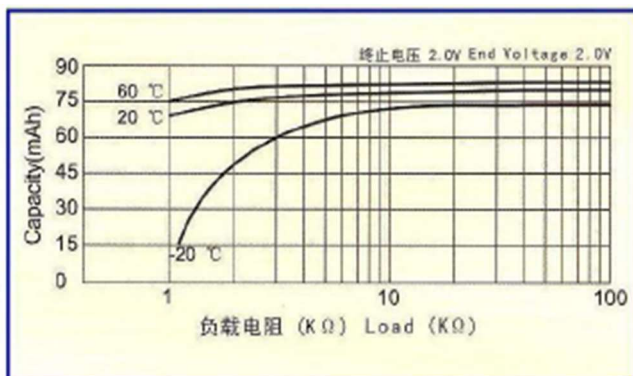

Pulse Discharge Characteristics

