

TECHNICAL DATA



LITHIUM SULPHUR DIOXIDE G20/2 SERIES


Size (ASA Designation) .. D
 Length..... 61.0mm
 Diameter 33.3mm
 Weight 85g
 Construction Hermetically sealed, all welded steel casing, incorporating a safety vent and a glass to metal seal

Voltage Nominal 3.0 volts
 Typical operating
 Voltage 2.65 - 2.80 volts
 Capacity (1000mA - 2.0v) 7.75Ah
 50% capacity achieved at 10,000mA
 Temperature range -50°C + 70 °C
 Shelf life at ambient temperature ... 10 years
 Self discharge Typical 2% p.a.


STANDARD TERMINATIONS

(OTHERS AVAILABLE ON REQUEST)


G20/2.1

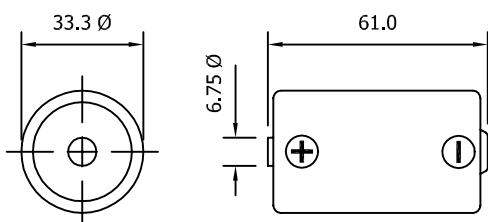


G20/2.4

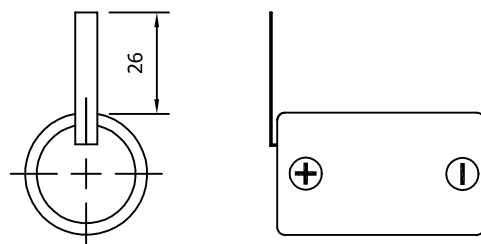

G20/2.2

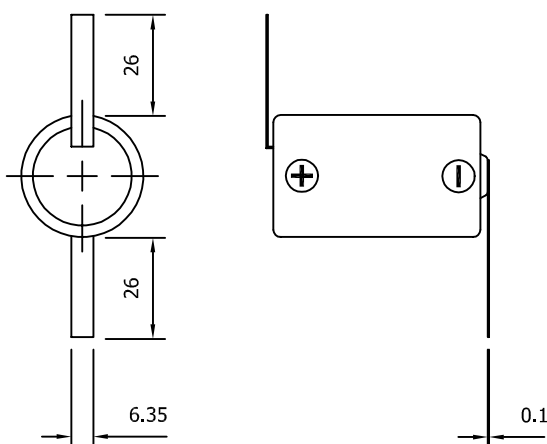

G20/2.10

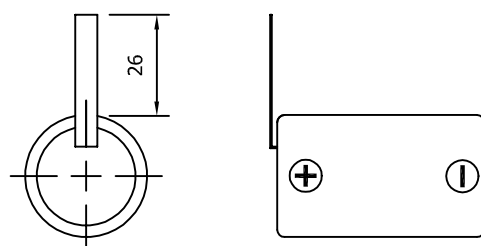




Typical order code example

G20 / 2 . 1

CELL SIZE	DISCHARGE RATING	TERMINATION STYLE
G20	2	1



TYPICAL ELECTRICAL PERFORMANCE

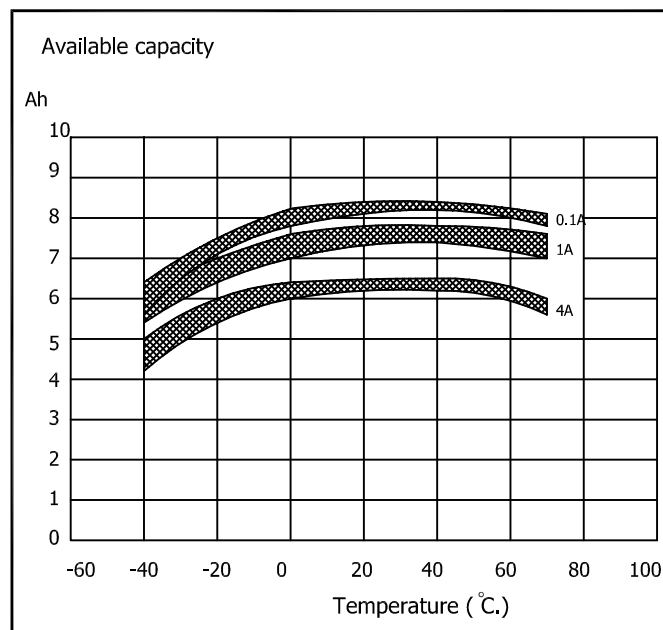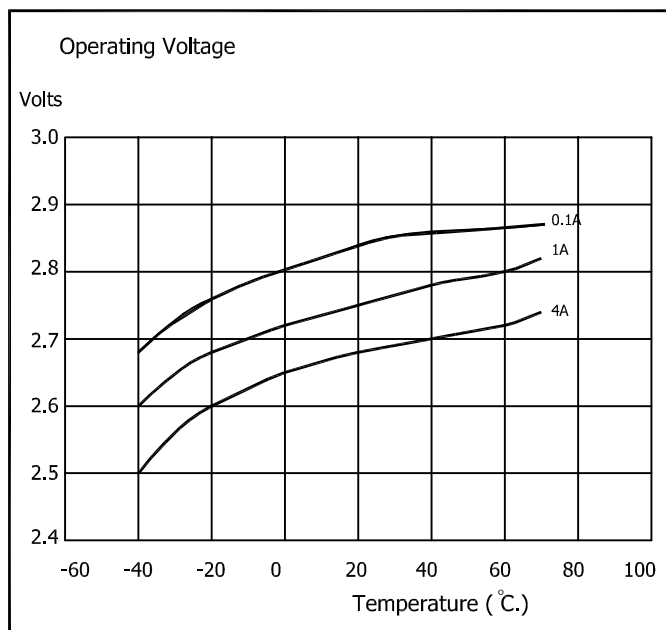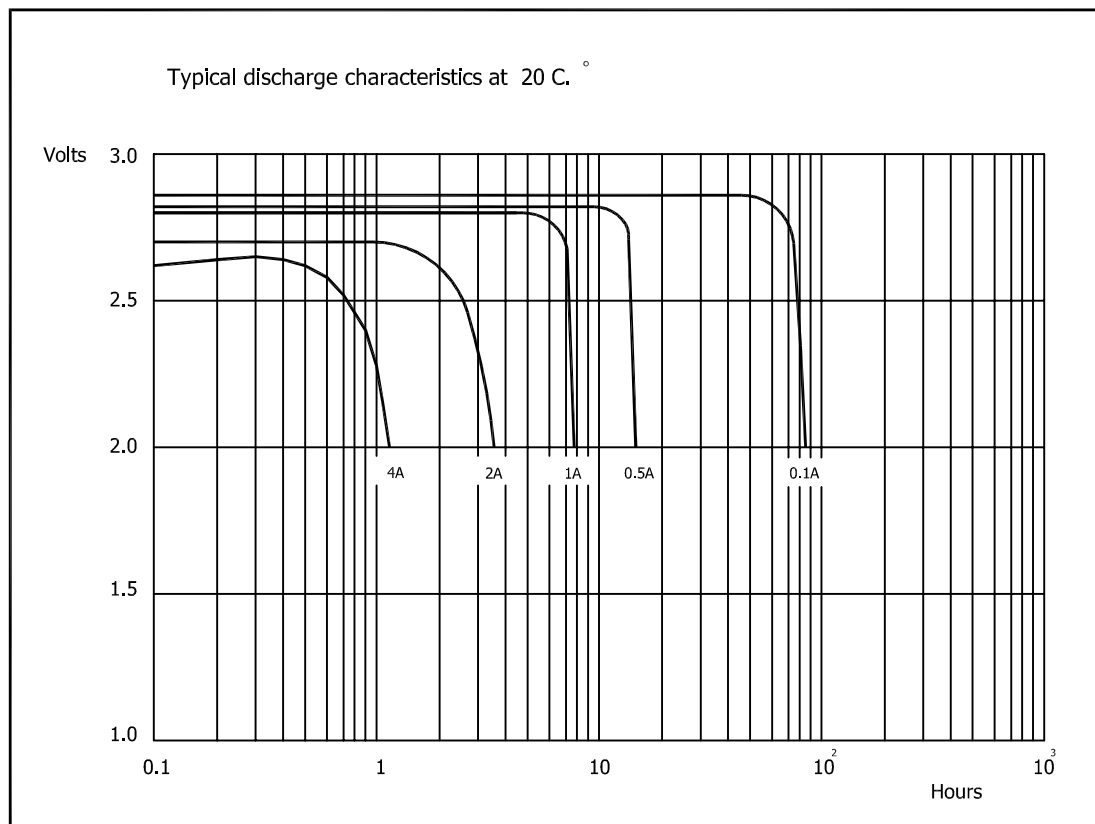

SAFT LTD, RIVER DRIVE, SOUTH SHIELDS, ENGLAND, TEL: 44 (0)191 4561451, FAX: 44 (0) 191 4566383.

SAFT LTD, adopt a policy of constant improvement and reserve the right to change specifications without notice.