

Power-Xtra CR2450-1VCDV - 3V Lithium Li-MnO₂ Battery - 2 Pins - Vertical


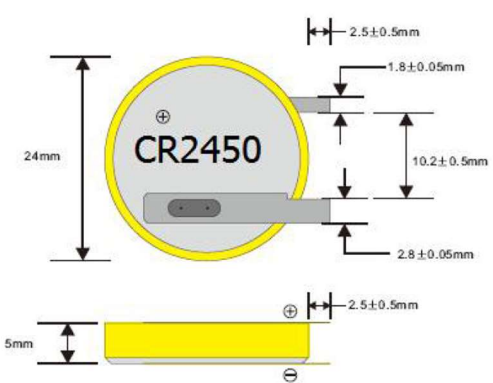
SPECIFICATIONS OF SINGLE CELL

Type	Li-MnO ₂ Buton with Pins
Stock Code	900.600.503.210
Model	CR2430, CR-2430, PX-CR2430-1VC

TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	300 mAh	Standard discharge with load 15k Ω
Off-load voltage	≥ 3.20 V	No load
Typical Weight	4.75 gr	
Recommended Storage Temperature Range	20+/-2°C	5 years after delivery under proper storage conditions.
Recommended Operation Temperature Range	-20° C to 60°C	
Shelf Life	5-7 Years	Recommended Storage Range : 20+/-2°C Recommended Humidity Range : 65+/-20%RH

Image and Technical Drawings

Image	Technical Drawing	STANDARD	
		Diameter	24.5 (-0.2) mm
		Height	3.2 (±0.1) mm