

## Power-Xtra CR2032-1H06YV - 3V Lithium Li-MnO<sub>2</sub> Battery - 2 Pins - Horizontal


### SPECIFICATIONS OF SINGLE CELL

Type	Li-MnO <sub>2</sub> Buton with Pins
Stock Code	900.600.503.249
Model	CR2032, CR-2032, CR2032-1H06YV


### TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	210 mAh	Standard discharge with load 15k $\Omega$
Instantaneous short-circuit current	$\geq 250$ mA	Time $\leq 0.5$ second
Off-load voltage	$\geq 3.20$ V	No load
Service Output - Initial	1132 h	Continuous discharge with load 15k $\Omega$ , till 2.0v end-voltage, Temperature $20 \pm 2^\circ\text{C}$ , under the condition of related humidity $\leq 75\%RH$
Service Output - After 12 months storage	1110 h	
Typical Weight	2.75 gr	
Recommended Storage Temperature Range	$20 \pm 2^\circ\text{C}$	5 years after delivery under proper storage conditions.
Recommended Operation Temperature Range	$-20^\circ\text{C}$ to $60^\circ\text{C}$	
Shelf Life	3-5 Years	Recommended Storage Range : $20 \pm 2^\circ\text{C}$ Recommended Humidity Range : $65 \pm 20\%RH$

#### Discharge Characteristics

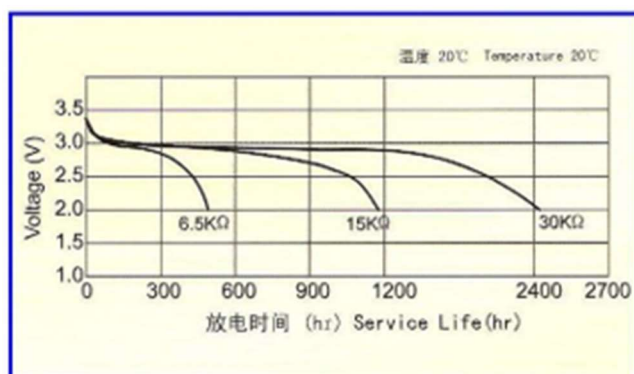


#### Temperature Characteristics

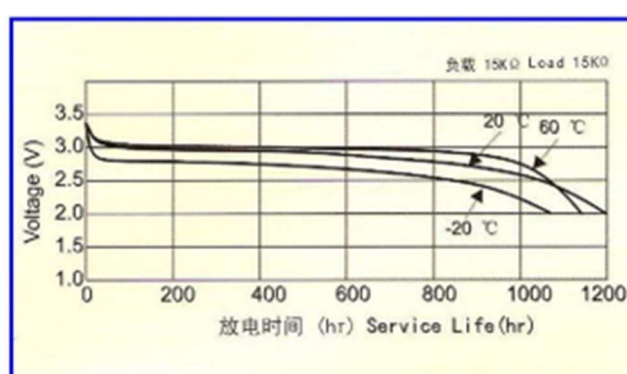


## Power-Xtra CR2032-1H06YV - 3V Lithium Li-MnO<sub>2</sub> Battery - 2 Pins - Horizontal

### Load Capacity

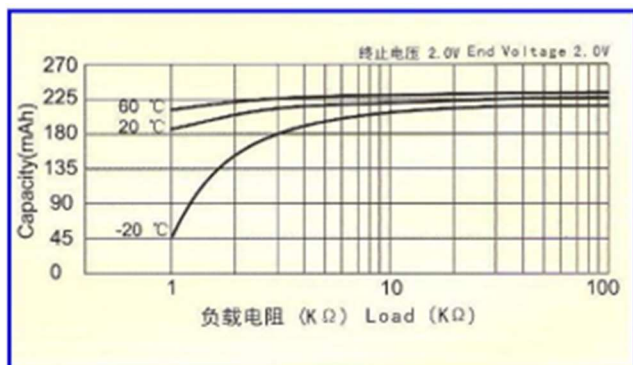

### Pulse Discharge Characteristics

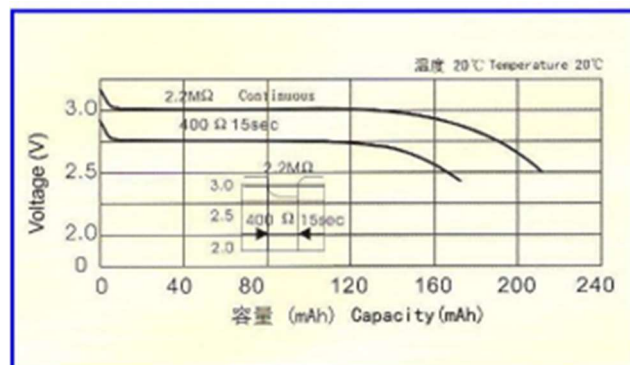


### TECHNICAL INFORMATION

Item	Test Methods	STANDARD	
Dimension	Using vernier caliper (accuracy $\geq$ 0.02) while avoiding short-circuit	Diameter	20.0 (-0.2) mm
		Height	3.2 ( $\pm$ 0.1) mm
Off-load voltage	Using multimeter (accuracy $\geq$ 0.25%) internal resistance $\geq$ 1M $\Omega$	$\geq$ 3.20v	
Instantaneous short-circuit current	Time of short-circuit should be less than 0.5 second and avoid repeated test within half an hour	$\geq$ 250 mA	
Appearance	Eyeballing	Bright, clean, no rust, no leakage, And no flaw	
Capacity	Continuously discharge for with load 15k $\Omega$ , temperature at 20~25°C, humidity at 65 $\pm$ 20% till 2.0v end-voltage (for fresh battery only; within 3 months )	$\geq$ 1132 h	
Vibration test	Put battery on the platform of the vibrations machine, start the machine and adjust the frequency form 10 times per minute to 15 times per minute. keep it running for an hour	Characteristics keep stability	
Leakage at high temperature test	Stored under temperature (50°C) for 10 days	No leakage allowed	
Over discharge Test	After 2.0v end-voltage, continuously discharged for 5 hours	No leakage allowed	

## Power-Xtra CR2032-1H06YV - 3V Lithium Li-MnO<sub>2</sub> Battery - 2 Pins - Horizontal

### Image and Technical Drawings

Image	Technical Drawing	STANDARD	
		Diameter	20.0 (-0.2) mm
		Height	3.2 (±0.1) mm