

1.2V 800 Mah - AA - Ni-Cd Battery - Bulk-Flat Head

Stock Code
900.600.503.004

SPECIFICATIONS OF SINGLE CELL

Type Nickel-Cadmium / Ni-Cd
Model AA/ 800 mAh

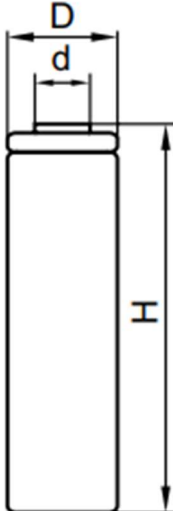
TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	1.2V	
Nominal Capacity	800 mAh	Standard Charge/Discharge
Standard Charge	80 mA (0.1C) × 16 hrs	Ambient temperature of 20±5°C, Relative Humidity: 65±20%
Standard Discharge	160mA (0.2C)	to 1.0V/cell / -20°C to 60°C
Rapid Charge	500mA for 2.6 hours	-delta V controlled: 15mV/cell cut-off dT/dt controlled: 1°C per min
Maximum Continuous Discharge Current	800mA	1C
Storage Temperature	-20 °C ~ 35°C	Discharged state
Weight	21gr. / approx.	
Open Circuit Voltage(OCV)	≥1.25V	Within 1hr after standard charge
Internal Impedance	≤35mΩ	Upon fully charge(1KHz)
Overcharge	No leakage nor explosion	The overcharge test is measured with a discharge current of 0.2C and a discharge final voltage of 1.0V/cell within 1-4 hours after charging for 28 days at a current of 0.1C. Check cell appearance after overcharge.
Charge Retention	≥520(65%)	Standard Charge, Storage: 7 day rest at 45Ambient Temperature, Standard Discharge
Cycles Test	≥500 Cycle	IEC61951-2:2003

1.2V 800 Mah - AA - Ni-Cd Battery - Bulk-Flat Head

Stock Code
900.600.503.004

TECHNICAL DRAWINGS

Item	Specifications	Drawings
Diameter	14.5 +0 / -1.0 mm	
Height	50.5 +0 / -1.5 mm	
High Top	-	
IMAGE		
		